

# Linda Storage Bed

### Assembly Installation Guide

### DESCRIPTION:

Headboard Footboard Side Rails Slat & Support Legs Storage Drawers

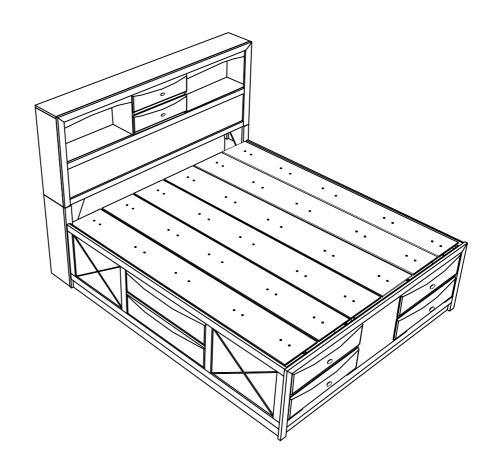

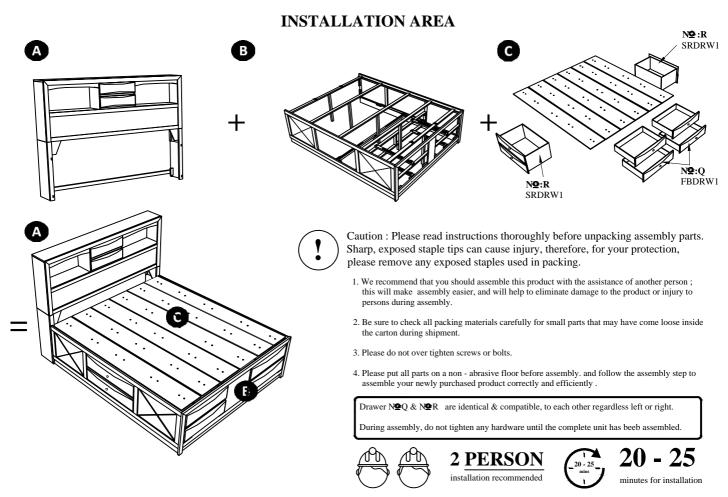

## BOX 1

### Box of Headboard & Footboard



Nº A

Headboard x 1



**№** C(L)

Headboard Leg (L) x 1



Drawer Support Rail 2 x 20 x 40 x 633mm

255 x 1420 x 1997 mm

 $N \subseteq C(R)$ 

NºB

Footboard x 1

42 x 570 x 1995mm

Headboard Leg (R) x 1



Nº₽F

Support Leg 2 x 1



Nº A1

Headboard Drawer x 2



NQD

Triangle Support Panel  $\mathbf{x} \ \mathbf{2}$ -9 x 200 x 200



NºG

Support Leg 3 x 1 30 x 30 x 107mm

### Hardware List



Flat Head Chipboard m4 x 32mm RBW



Pan Head Chipboard Screw x 8 m3.5 x 20mm BLK



JCBC Bolt x 4 BLK



JCBC Bolt x 2 m6 x 50mm BLK



N**2** 5 Spring Washer x 6 1/4" RBW



Flat Washer x 6 1/4" ID x 13mm OD BLK



Allen Key **x 1** m4 x 110mm BLK

# BOX 2

### Box of Side rail



NOH

Side Rail x 2 39 x 570 x 2060mm



NQI

Bed Slat x 3 18 x 45 x 1951mm



F/Board Drawer Frame x 1





Concealed Panel x 6

9 x 295 x 2040mm

Nº K



Supprt Leg 1 x 5 30 x 30 x 518mm



NO L

H/Board Back Support 1 **x 1** 19 x 30 x 1965mm



H/Board Back Support 2 x 1 18 x 45 x 1965mm



NQJ

40 x 220 x 1951mm



NO M

Drawer Support Rail x 1 30 x 30 x 1951mm



Bed Slat With Marking x 2

### Hardware List



N**2**8 Flat Head Chipboard Screw x 16 m4 x 32mm RBW



Pan Head Chipboard Screw x 32 m3.5 x 20mm BLK



JCBC Bolt x 15 m6 x 35mm



JCBC Bolt x 6 m6 x 50mm



Nº 13 Flat Washer x 15 BLK



Z - Bracket x 1



Allen Key **x 1** m4 x 110mm BLK

## BOX 3 & 4

### Box of Parts & Hardware





Drawer 2 x 2



Handle x8



Screw Handle x 4



Nº 18 Truss Head M. Screw Handle x 4








Headboard Assembly Installation

Rotate the Headboard (A) down and turn to back.

Box 1: NoA








STEP 03

STEP **01** 

Insert Spring washer (5), Flat Washer (6), tighten JCBC bolt (3) by using an Allen Key (7).


Box 1: NQ 3 + NQ 5 + NQ 6 + NQ 7

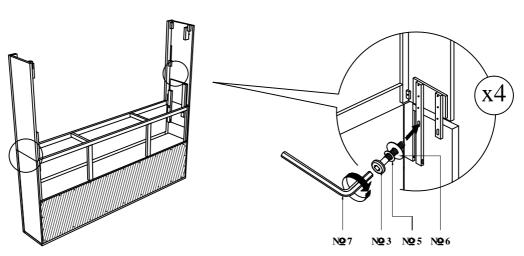



Insert Spring washer (5), Flat Washer (6), tighten JCBC bolt (4) by using an Allen Key (7).

Box 1: N24 + N25 + N26 + N27

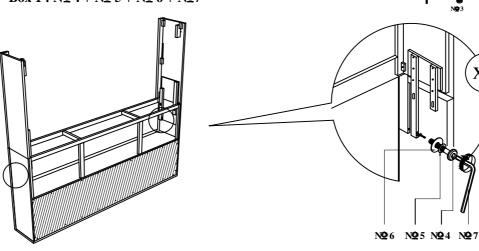






Headboard Assembly Installation



Attach and tighten the triangle Support Panel (D) to the Headboard and tighten the Panhead screw (2) using screw driver . (Not included)





Box 1 : No D + No 2

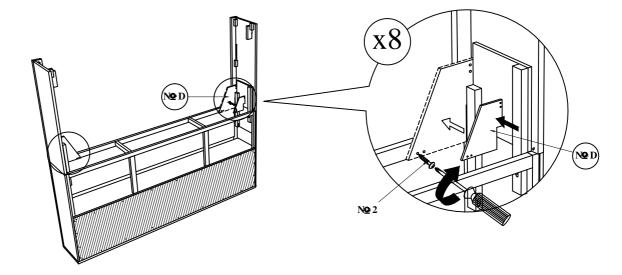



Attach Headboard Back Support (L) & (O) as picture shown. Tighten the CSK screw (1) using a screw driver. (Not included)

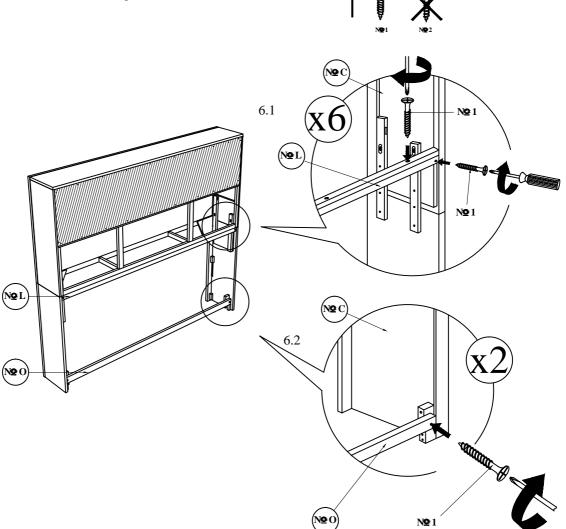

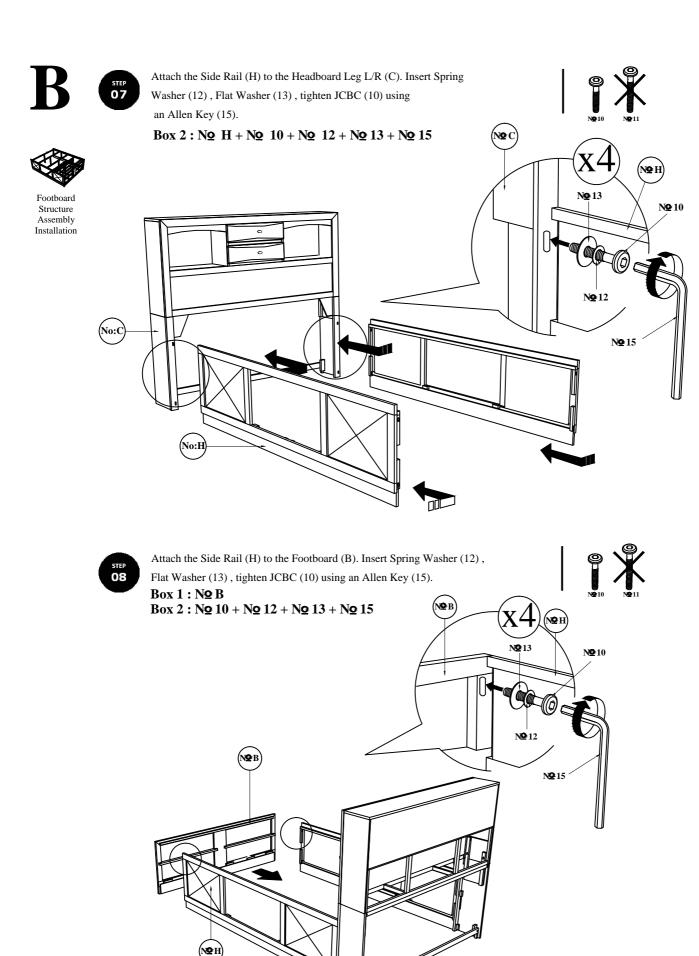

STEP 09  $\label{eq:continuous} Attach \ Support \ Leg\ (G) \ \ to \ the \ Footboard \ Drawer \ Frame\ (J). \ Insert \ Spring \\ Washer\ (12)\ , \ Flat\ Washer\ (13)\ , \ \& \ tighten\ JCBC\ (10)\ using \qquad an \ Allen\ Key(15).$ 


Box 1: No G

Box 2 : NQ J + NQ 10 + NQ 12 + NQ 13 + NQ 15






Structure Assembly Installation

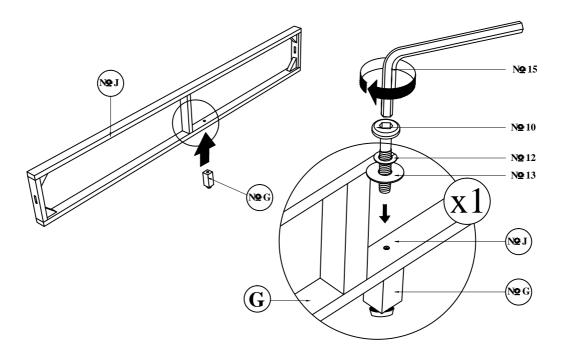

STEP 10 Attach the Footboard Drawer Frame (J) to the Side Rail (H). Insert Spring Washer (12), Flat Washer (13), tighten JCBC (10) using Allen Key (15).

Box 2: NQ 10 + NQ 12 + NQ 13 + NQ 15



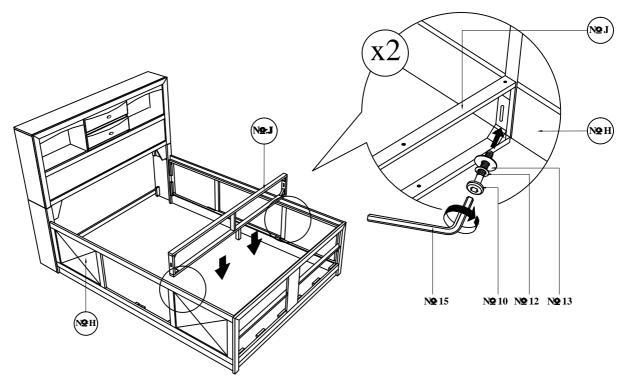


STEP 111

Attach the Drawer Support Rail (E) to the Footboard (B) using CSK Screw (8) and tighten with Screw Driver. ( Not included)






Footboard Structure Assembly Installation

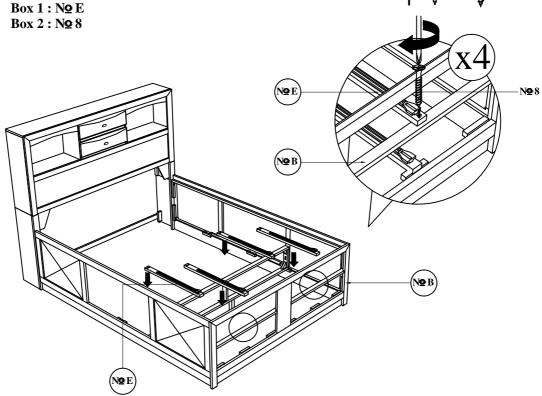

STEP 12 Attach the Drawer Support Rail (E) to the Footboard Drawer Frame (J). Insert Spring Washer (12), Flat Washer (13) & tighten JCBC Bolt (10) using an Allen Key (15).



Box 2: N = 10 + N = 12 + N = 13 + N = 15

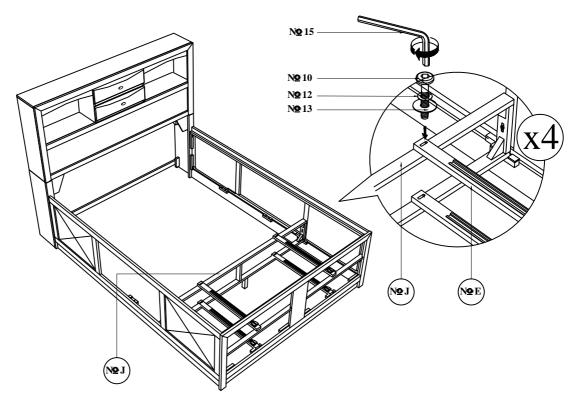

STEP 13

Attach Support Leg 2 (F) to the Drawer support Rail (M). Tighten JCBC Bolt (11) using an Allen Key (15)


Box 1: No F

Box 2: NQM + NQ11 + N 15






Footboard Structure Assembly Installation

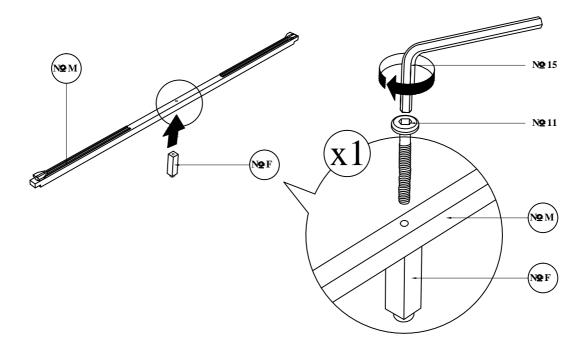

STEP 14 Attach Drawer Support Rail (M) to the Side Rail (H) using CSK Screw (8) and tighten with Screw Driver. ( Not included)

Box 2 : Nº 8



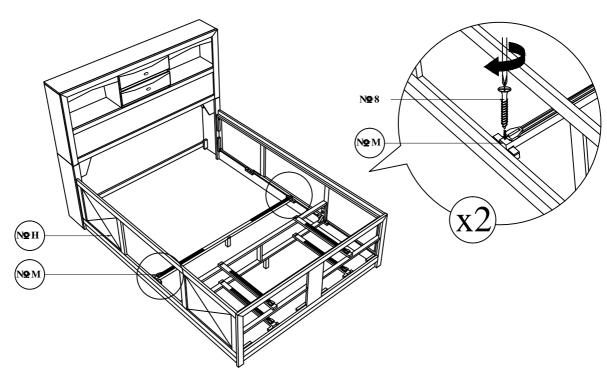

STEP 15


Attach Bed Slat (I) & (P) to the Bed Slat Support (N) . Tighten JCBC Bolt (11) using an Allen Key (15). ( Loosen and tighten the Adjuster to stability of bed)



Box 2 : NQI + NQN + NQO + NQP + NQ11 + NQ15



Footboard Structure Assembly Installation

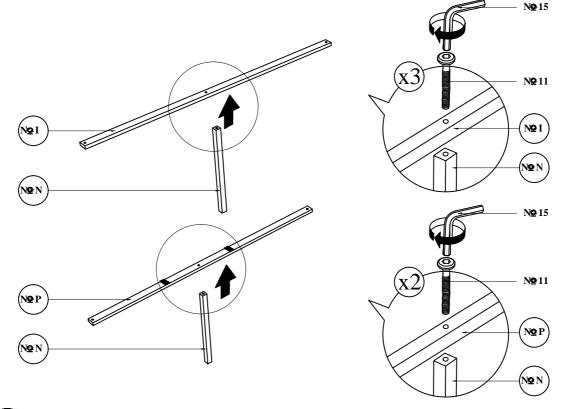


STEP 16

Attach Z-Bracket (14) to the Bed Slat Support (N) and Support Leg 2 (F). Use Panhead Screw (9) and tighten with Screw Driver. ( Not included)

Box 2 : No 9 + No 14





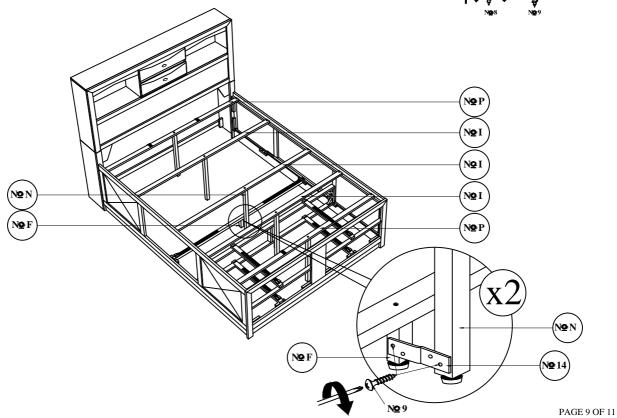

C


STEP 17

Slide Drawer - 2 (R) into position over Draer Support Rail -1 (M). Then slide Drawer - 1 (Q) into position over Drawer Support Rail - 2 (E). Adjust the adjuster for alignment of drawer box.

Box  $3: \mathbb{N} Q + \mathbb{N} Q R$ 



Panel & Drawer Assembly Installation

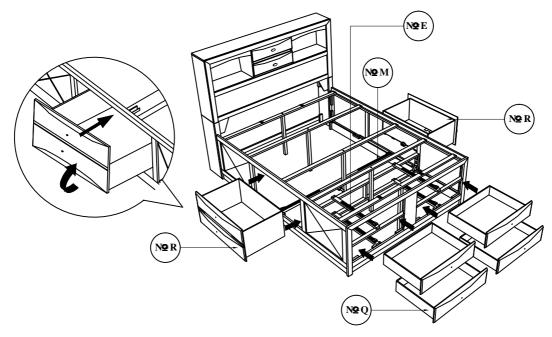

STEP 18 Install the handle (16) in the front or drawer (R). Tighten the Handle Screw (18) using Screw Driver. (Not included)


Install the Handle (16) in front of drawer (Q). Tighten the Handle Screw (17) using Screw Driver. (Not included)

Then Push together the Slide Rail (H) with Bed Slat (I) & tighten with CSK Screw (8) by using Screw Driver. (Make sure the center of Bed Slat (I) is aligned with the marked line as shown).

Box 2 : Nº 8

Box 3: NQ 16 + NQ 17 + NQ 18



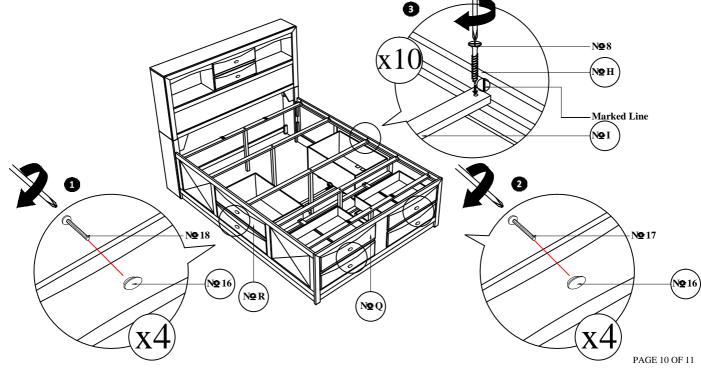



19

Attention! Screw on this markings on concealed panel slat (K).



Conceal Panel & Drawer Assembly Installation

